


Technical specifications

SARLON® quartz legend

This heterogeneous project vinyl meets the requirements of EN 651

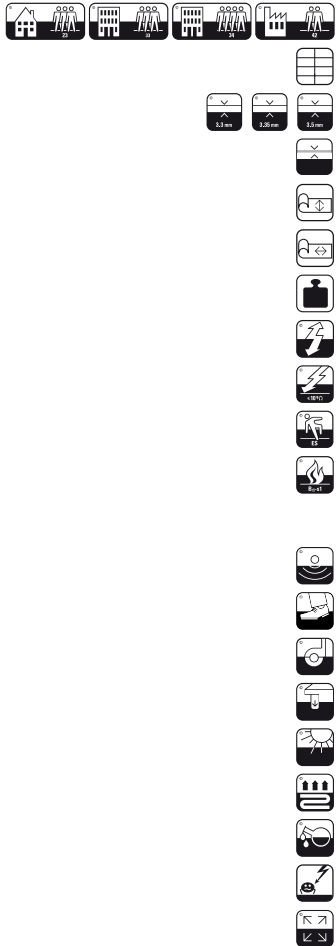

		33	43	Complete Step
Classification	EN 685	23/33	34/42	34/42
Collection size		24	24	6
Total thickness	EN 428	3.3 mm	3.35 mm	3.5 mm
Thickness wear layer	EN 429	0.75 mm	0.80 mm	1 mm
Roll width	EN 426	2.00 m	2.00 m	1.02 m
Roll length	EN 426	25 m	25 m	20 m
Weight	EN 430	2.9 kg/m ²	3.1 kg/m ²	3.5 kg/m ²
Static charge	EN 1815	< 2 kV	< 2 kV	< 2 kV
Electrical resistance	EN 1081	10 ⁹ Ω	10 ⁹ Ω	10 ⁹ Ω
Slip resistance	ZH 1-571	R9	R9	R9
Fire rating	EN 13501-1	B _{fl, s1}	B _{fl, s1}	B _{fl, s1}
	NF P92 506			M3
Impact sound reduction	EN ISO 717-2	17 dB	17 dB	15 dB
Wear resistance (group)	EN 660-1	T	T	T
Castor chair resistance	EN 425	No effect	No effect	No effect
Residual indentation	EN 433	0.10 mm	< 0.10 mm	< 0.20 mm
Colour fastness	ISO 105-B02	7	7	7
Thermal conductivity	DIN 52612	0.15m ² K/W	0.04m ² K/W	0.04m ² K/W
Chemical resistance	EN 423	Good resistance	Good resistance	Good resistance
Fungus resistance	EN ISO 846	Rate 0	Rate 0	Rate 0
Dimension stability	EN 434	0.05% - 1.5 mm	< 0.1%	< 0.1%

The above information is subject to modifications for the benefit of further improvements.